



SHEAR WRENCHES



GM161EZ
for M12 • M16
5/8"



GM221EZ
for M16 • M20 • M22
5/8" • 3/4" • 7/8"



Extensions and Long Sockets
Available



GMC221EZ
for M16 • M20 • M22
5/8" • 3/4" • 7/8"




GHC241EZ
for M16 • M20 • M22 • M24
5/8" • 3/4" • 7/8" • 1"



GVC301EZ
for M27 • M30
1 1/8"



GH241EZ
for M16 • M20 • M22 • M24
5/8" • 3/4" • 7/8" • 1"

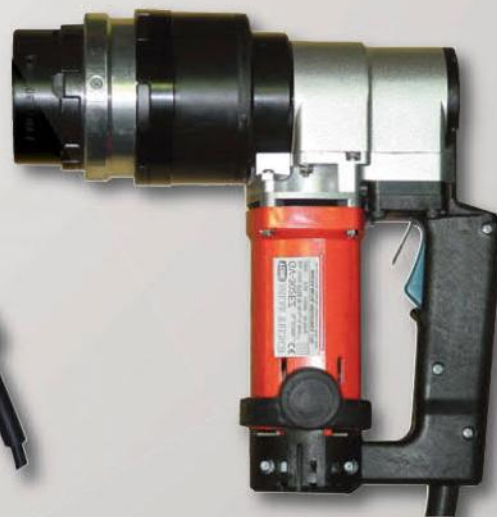

GV301EZ
for M27 • M30
1 1/8"




GX361EZ
for M36

GSULR300
for M30



GH240 Electric Shear Wrench

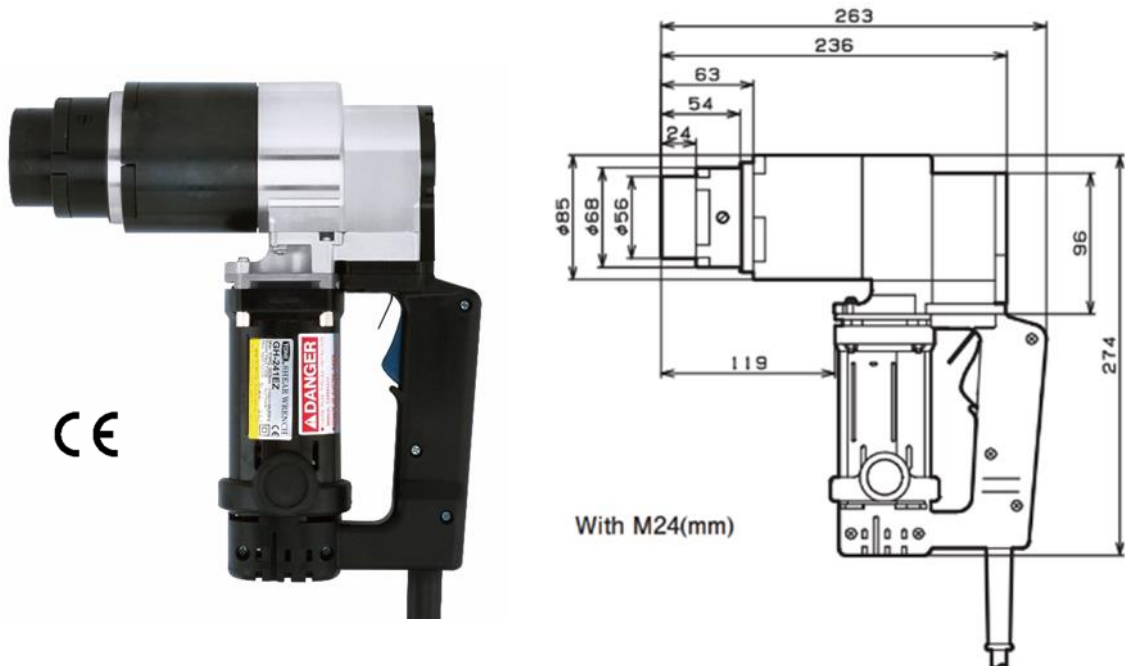

Adaptable Bolt Diameter

Metric	M16	M20	M22	M24
Imperial	5/8"	3/4"	7/8"	1"

Extension Sockets


Metric	M22x200	M24x200	100mm Extension Holder
Imperial			

Specifications

Model	GH241EZ	GH242EZ
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	11A	5.5A
Rated Input Power	1200W	
Frequency	50-60 Hz	
Rated Max. Torque	950 Nm (701 ft-lbs)	
No-Load Speed	10 rpm	
Weight	7.5 kg (16.5 lb)	
Protection Class	Class II (Double Insulation)	



GHC240 Electric Corner Shear Wrench

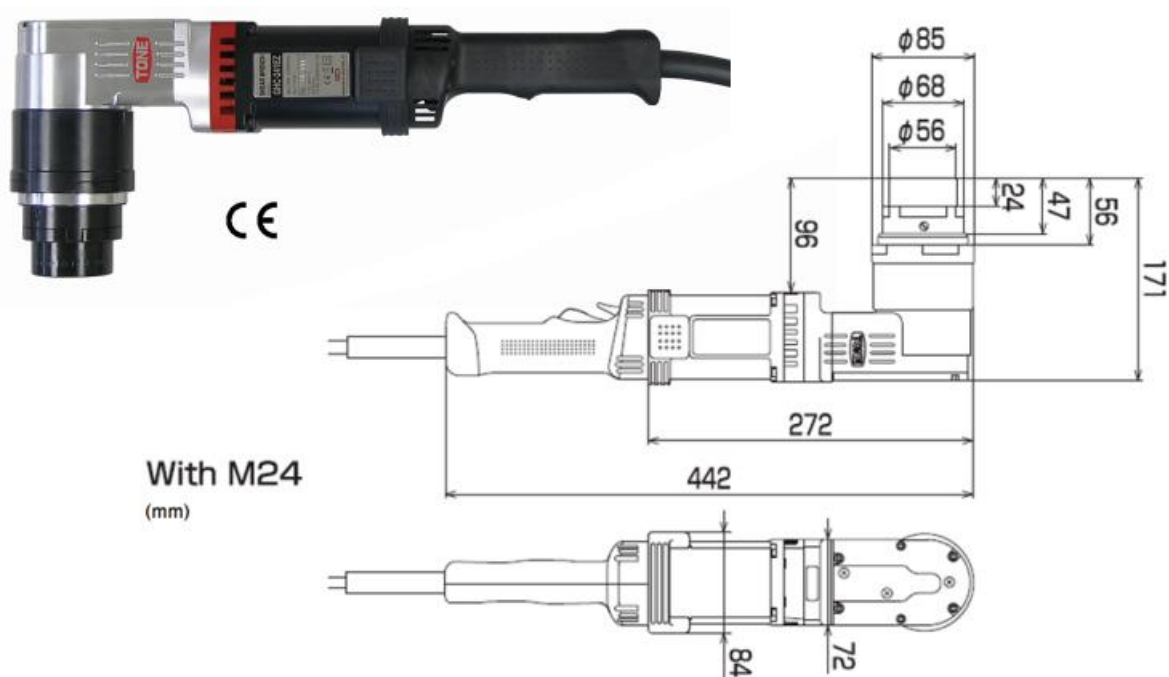

Adaptable Bolt Diameter

Metric	M16	M20	M22	M24
Imperial	5/8"	3/4"	7/8"	1"

Extension Sockets


Metric	M22x200	M24x200	100mm Extension Holder
Imperial			

Specifications

Model	GHC241EZ	GHC242EZ
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	13.5A	7A
Rated Input Power	1650W	
Frequency	50-60 Hz	
Rated Max. Torque	1250 Nm (922 ft-lbs)	
No-Load Speed	11 rpm	
Weight	6.8 kg (15 lb)	
Protection Class	Class II (Double Insulation)	



GM160 Electric Shear Wrench

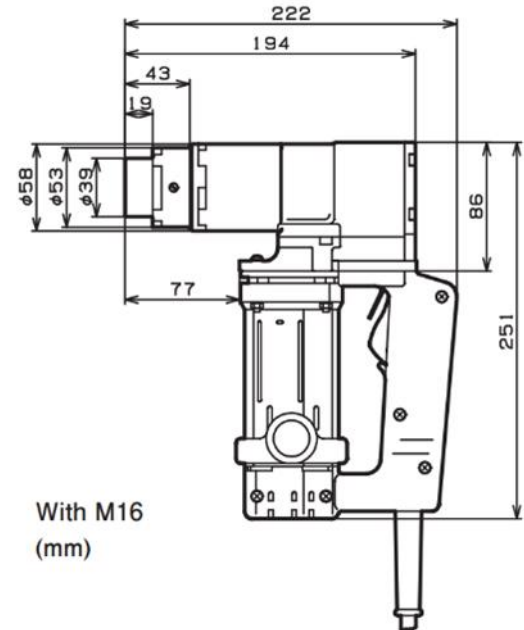

Adaptable Bolt Diameter

Metric	M12	M16
Imperial		5/8"

Extension Sockets


Metric	M12x200	M16x200	100mm Extension Holder
Imperial			

Specifications

Model	GM161EZ	GM162EZ
Rated Voltage (Single Phase)	1102-120V	220-230V
Max. Current	10A	5A
Rated Input Power	1100W	
Frequency	50-60 Hz	
Rated Max. Torque	294 Nm (217ft lbs)	
No-Load Speed	29 rpm	
Weight	4.5 kg (9.9 lb)	
Protection Class	Class II (Double Insulation)	



GM220 Electric Shear Wrench

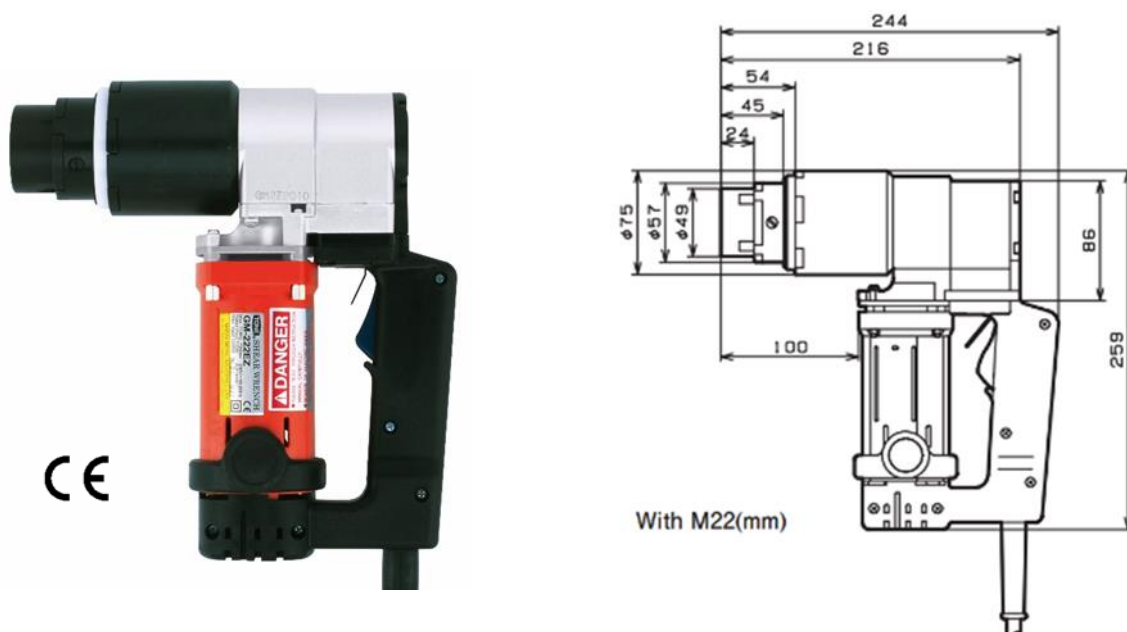

Adaptable Bolt Diameter

Metric	M16	M20	M22
Imperial	5/8"	3/4"	7/8"

Extension Sockets


Metric	M16x200	M20x200	M22x200	100mm Extension Holder
Imperial				

Specifications

Model	GM221EZ	GM222EZ
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	11A	5.5A
Rated Input Power	1200W	
Frequency	50-60 Hz	
Rated Max. Torque	735 Nm (542 ft-lbs)	
No-Load Speed	14 rpm	
Weight	5.7 kg (12.6 lb)	
Protection Class	Class II (Double Insulation)	



GMC220 Electric Corner Shear Wrench

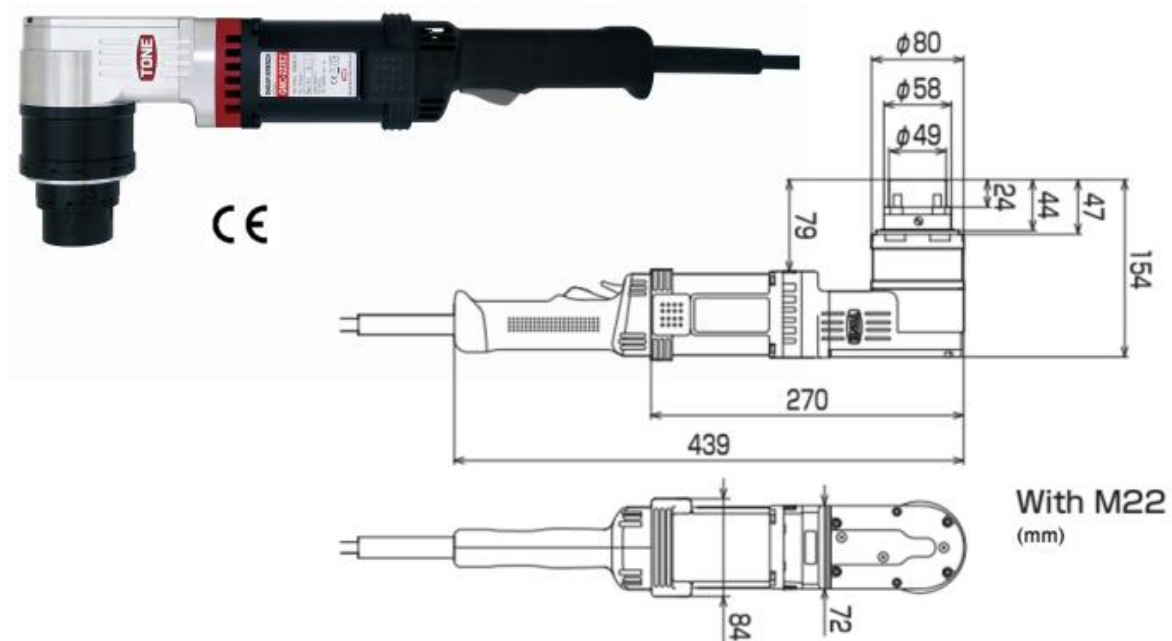

Adaptable Bolt Diameter

Metric	M16	M20	M22
Imperial	5/8"	3/4"	7/8"

Extension Sockets


Metric	M16x200	M20x200	M22x200	100mm Extension Holder
Imperial				

Specifications

Model	GMC221EZ	GMC222EZ
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	13.5A	7A
Rated Input Power	1550W	
Frequency	50-60 Hz	
Rated Max. Torque	800 Nm (590 ft-lbs)	
No-Load Speed	17 rpm	
Weight	6.2 kg (13.7 lb)	
Protection Class	Class II (Double Insulation)	



GSULR300 Electric Shear Wrench

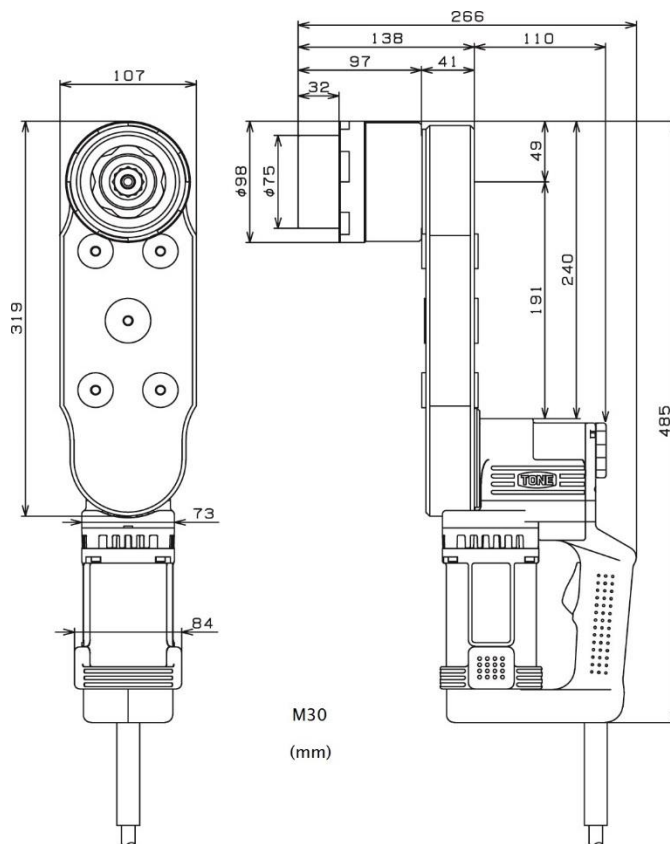

Adaptable Bolt Diameter


Metric	M30
--------	-----

Specifications

Model	GSULR301E-CE	GSULR302E-CE
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	14A	7.5A
Rated Input Power	1550W	
Frequency	50-60 Hz	
Rated Max. Torque	2150 Nm (1586 ft-lbs)	
No-Load Speed	4.5 rpm	
Weight	12.4 kg (27.3 lb)	
Protection Class	Class II (Double Insulation)	



GV300 Electric Shear Wrench

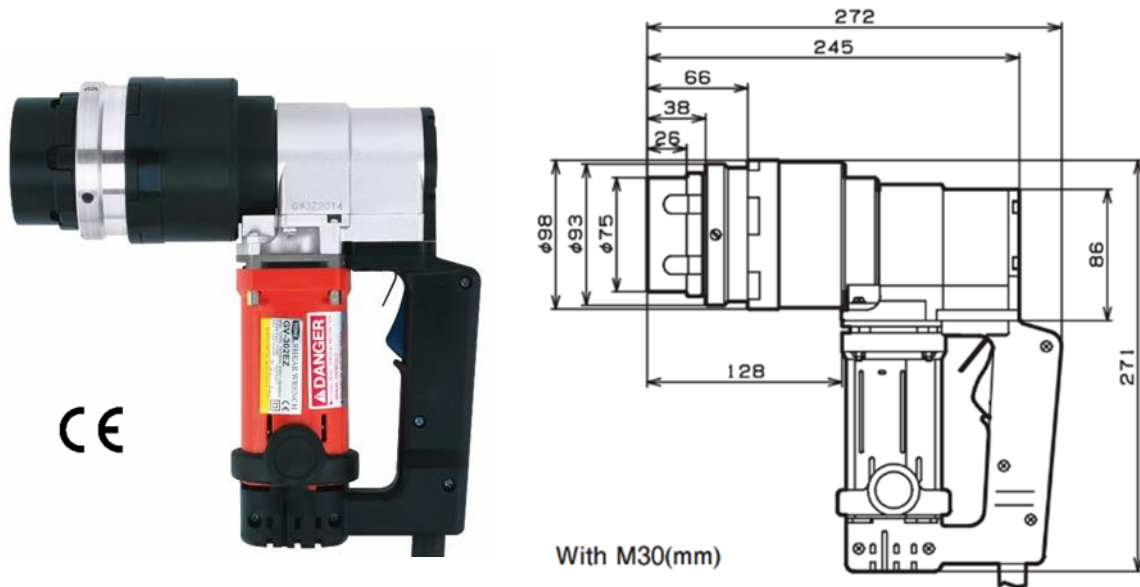

Adaptable Bolt Diameter

Metric	M27	M30
Imperial	1-1/8"	

Extension Sockets


Metric	M27x200	M30x200
--------	---------	---------

Specifications

Model	GV301EZ	GV302EZ
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	11A	5.5A
Rated Input Power	1200W	
Frequency	50-60 Hz	
Rated Max. Torque	1900 Nm (1402 ft-lbs)	
No-Load Speed	5 rpm	
Weight	8.4 kg (18.5 lb)	
Protection Class	Class II (Double Insulation)	



GVC300 Electric Corner Shear Wrench

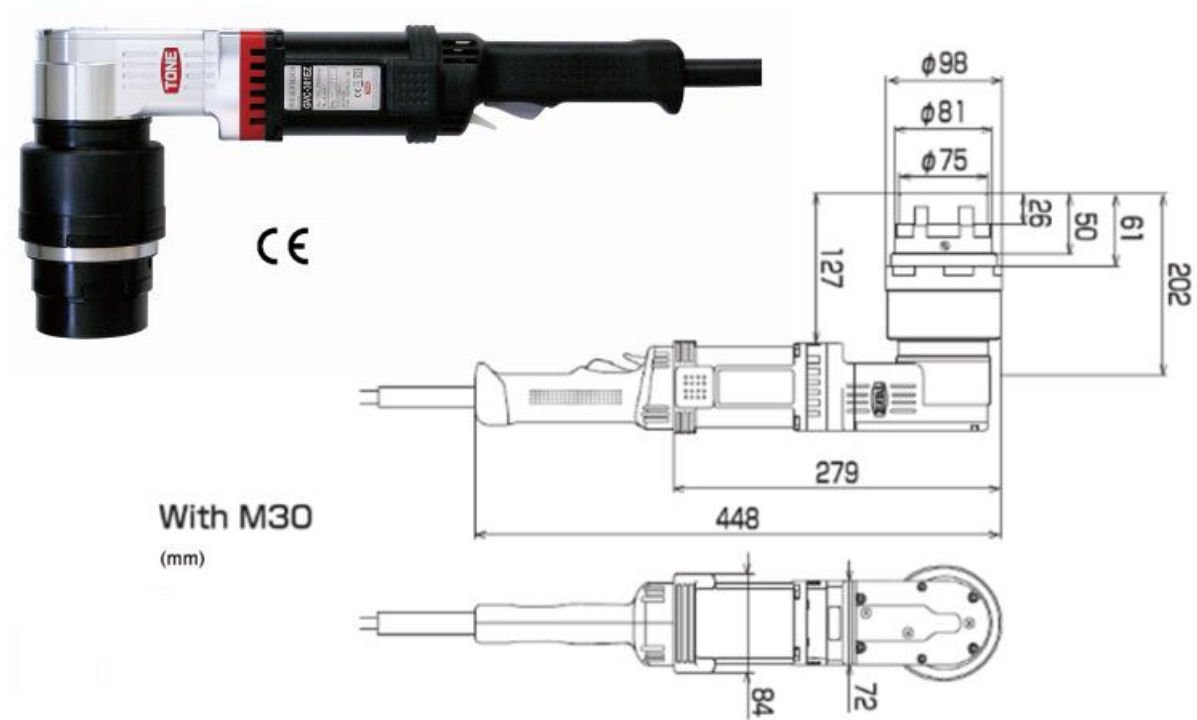

Adaptable Bolt Diameter

Metric	M27	M30
Imperial	1-1/8"	

Extension Sockets


Metric	M27x200	M30x200
--------	---------	---------

Specifications

Model	GVC301EZ	GVC302EZ
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	14A	7A
Rated Input Power	1550W	
Frequency	50-60 Hz	
Rated Max. Torque	2150 Nm (1586 ft-lbs)	
No-Load Speed	6 rpm	
Weight	8.8 kg (19.4 lb)	
Protection Class	Class II (Double Insulation)	



GX360 Electric Shear Wrench

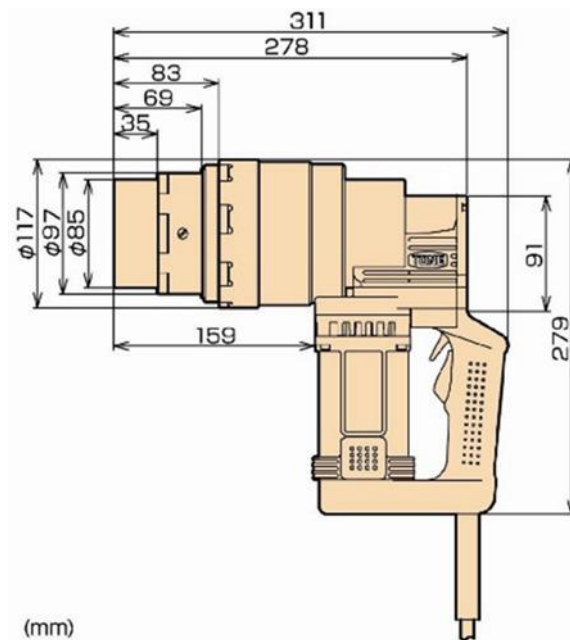

Adaptable Bolt Diameter

Metric	M36
--------	-----

Extension Sockets

Metric	-
--------	---

Specifications

Model	GX361EZ	GX362EZ
Rated Voltage (Single Phase)	110-120V	220-230V
Max. Current	12.5A	6.5A
Rated Input Power	1400W	
Frequency	50-60 Hz	
Rated Max. Torque	4000 Nm (2950 ft-lbs)	
No-Load Speed	2.8 rpm	
Weight	12.6 kg (27.8 lb)	
Protection Class	Class II (Double Insulation)	